








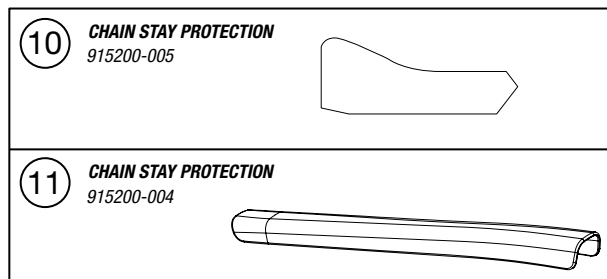
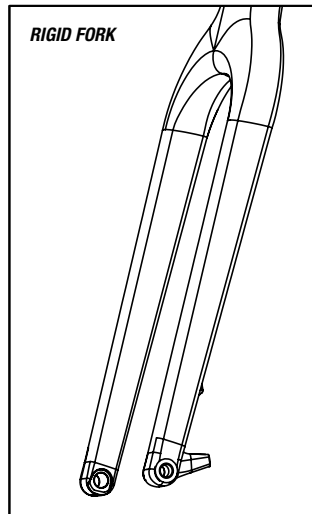
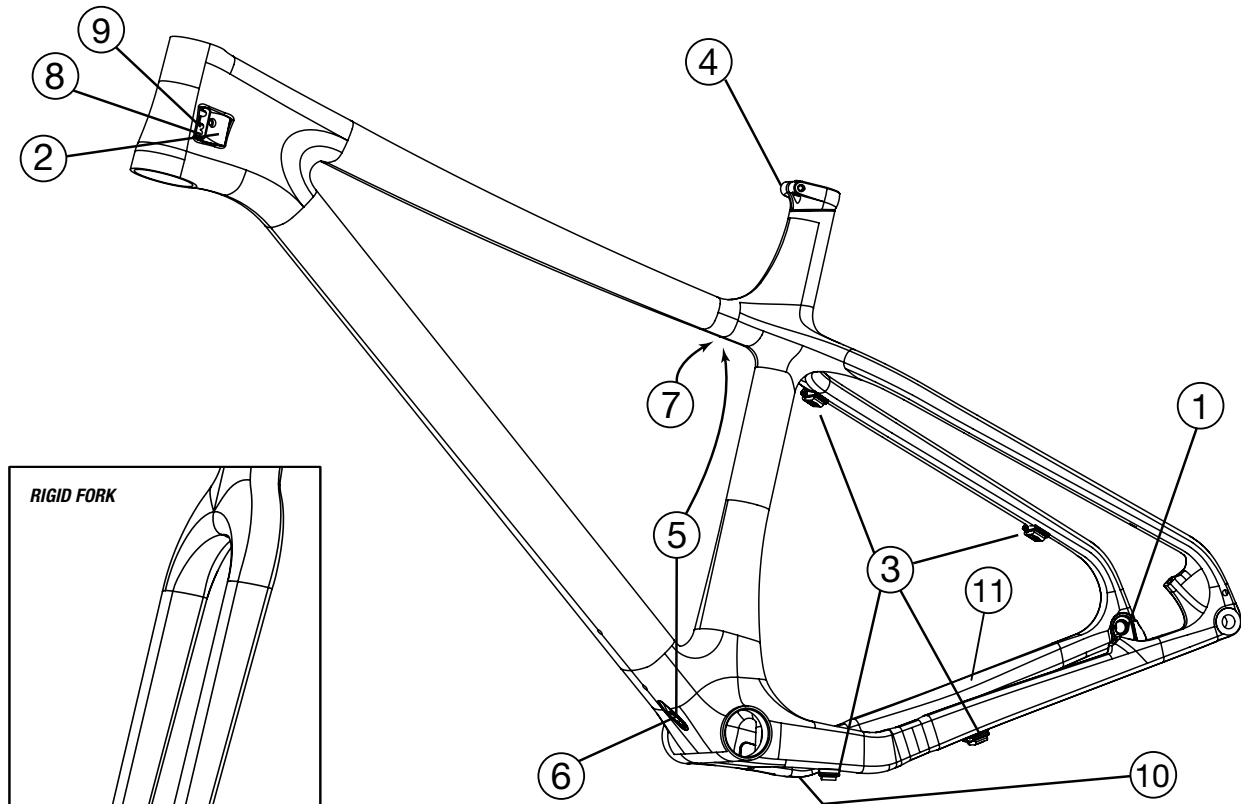


<p>1</p>	<p>DERAILLEUR HANGER 959375-15-2</p>  <p>M4X6MM COUNTERSUNK</p>
<p>2</p>	<p>INTERNAL CABLE GUIDE 914100-016</p>  <p>M4X10MM LOW PROFILE SOCKET HEAD</p>
<p>3</p>	<p>RD & RB CABLE GUIDE 914100-002</p>  <p>M5X16MM COUNTERSUNK</p>
<p>4</p>	<p>SEAT COLLAR 915000-002</p> 
<p>5</p>	<p>CABLE PORT 959800-15-310</p>  <p>M3X8MM BUTTON HEAD</p>
<p>6</p>	<p>5MM GROMMET 959800-15-307</p> 
<p>7</p>	<p>4MM GROMMET 959800-15-306</p> 
<p>8</p>	<p>BLANK FOR INTERNAL GUIDE 914100-018</p> 
<p>9</p>	<p>4MM REDUCER FOR INTERNAL GUIDE 914100-017</p> 



FRAME SPECIFICATIONS

Seat post:	31.6mmØ
Seat clamp:	34.9mmØ
Front derailleur:	Not compatible
Bottom bracket:	PF92/L=121mm
Headtube:	Tapered 1.125" - 1.5"
Headset:	S.H.I.S. IS42/28.6 IS52/40
Brakes:	Post mount 160mm
Front axle:	15x150 L198 M15x1.5
Rear axle:	12x197 L229 M12x1.75 (Maxle standard)